

T7506C Electronic Temperature Sensors

SPECIFICATION DATA


FEATURES

- Fast response.
- Precise temperature measurement.
- 100 ohm or 4~20mA outputs

GENERAL

The T7506 C is 100 ohm platinum resistance or 4~20mA output temperature detectors (RTD's), that sense temperature in electronic HVAC systems. They are designed for a variety of media such as air, liquid and steam. All sensors are Honeywell brand labeled.

Sensors are available in different housings for space, surface, duct, immersion, duct averaging, strap-on and outside air applications.

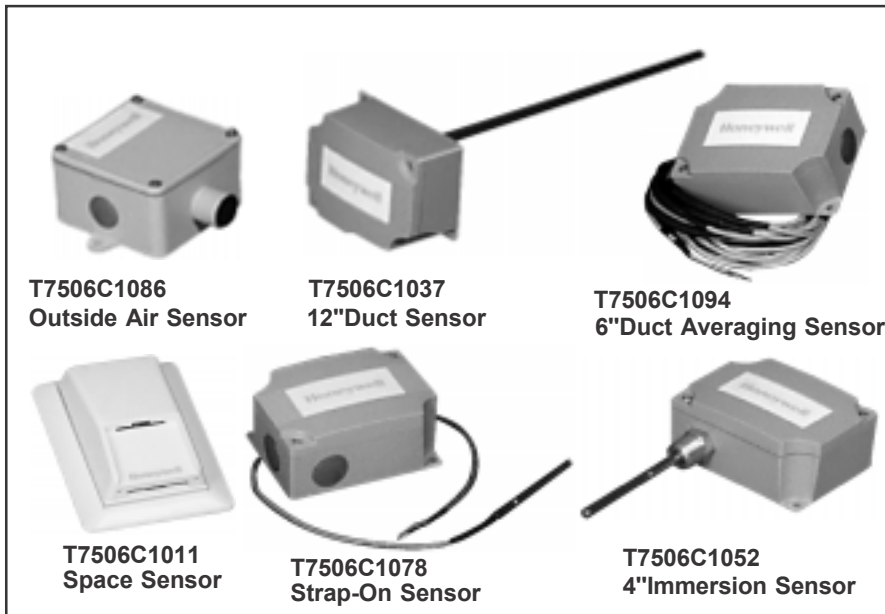

100 OHM PLATINUM SENSORS

O/S NUMBER	DESCRIPTION
T7506C1011	Space designer
T7506C1029	8" SS duct sensor
T7506C1037	12" SS duct sensor
T7506C1045	18" SS duct sensor
T7506C1052	4" SS spring-loaded immersion sensor-requires thermowell
T7506C1060	6" SS spring-loaded immersion sensor-requires thermowell
T7506C1094	6' flex-duct averaging sensor
T7506C1102	12' flex-duct averaging sensor
T7506C1110	20' flex-duct averaging sensor
T7506C1128	24' flex-duct averaging sensor
T7506C1078	2" SS strap-on sensor
T7506C1086	Outside air sensor c/w sunshield

4-20mA OPTION FOR 100 OHM PLATINUM SENSOR

SUFFIX TO O/S	DESCRIPTION
-1	0°-35°C (32°-95°F), 24 VDC
-2	0°-50°C (32°-122°F), 24 VDC
-3	0°-100°C (32°-212°F), 24 VDC
-4	50°-150°C (122°-302°F), 24 VDC
-5	50°-250°C (122°-482°F), 24 VDC
-6	-50°-50°C (-58°-122°F), 24 VDC


SPECIFICATIONS

Models:

T7506C1001 Space Sensor:

The T7506C is a wall mounted sensor complete with designer cover.

© U.S. Registered Trademark
Copyright © 1999 Honeywell Inc. • All Rights Reserved

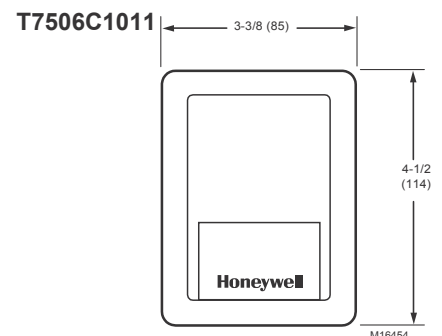

T7506C1086 Outside Air Sensor:

The T7506C sensor is housed in a PVC weatherproof enclosure. The platinum sensing element is protected by a sun/wind shield.

Duct Sensor:

The T7506C duct sensor measures air temperature in a duct. The platinum sensing element is in the tip of a stainless steel probe.

- 200mm (8 in.) probe T7506C1029
- “A” • 300mm (12 in.) probe T7506C1037
- 450mm (18 in.) probe T7506C1045

Duct Averaging Sensor:

The T7506C is a duct averaging temperature sensor of a totally flexibly plenum rated (CSA FT6) cable which incorporates numerous sensors at equal distances across its length acting as a single sensor.

- 1820mm (6 ft.) cable T7506C1094
- “B” • 3660mm (12 ft.) cable T7506C1102
- 6000mm (20 ft.) cable T7506C1110

T7506C1078 Strap-on Sensor:

The T7506C strap-on sensor is a remote probe that can be strapped on a pipe or any other application in which temperature is measured.

Immersion Sensor:

The T7506C Immersion sensor is encapsulated in a spring-loaded probe that can be fitted directly into any thermowell providing contact with the bottom of the thermowell.

- “C” • 100mm (4 in.) probe T7506C1052
- 150mm (6 in.) probe T7506C1060

Sensor Element:

100 ohm Platinum thin film. Positive Temperature Coefficient. Operating Range -40 to +100°C. (-40 to 212 F) Humidity: 5 to 95 RH non-condensing.

Sensor Accuracy

±0.1 % at 0°C ohms/ohm/°C

Transmitter Accuracy


±0.2°C FS

Accessories


Immersion Sensor:

- Brass Well 100mm 40761553-001
- Brass Well 150mm 40761554-001
- Stainless Steel Well 100mm 40761555-001
- Stainless Steel Well 150mm 40761556-001


T7506C1086

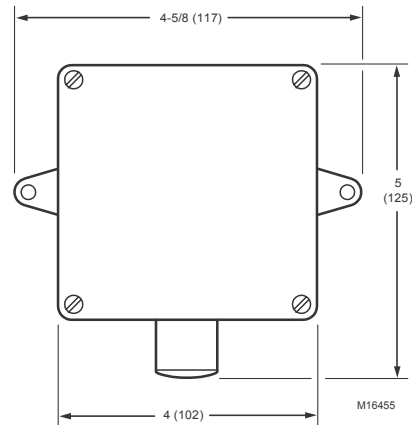


T7506C Duct Sensor

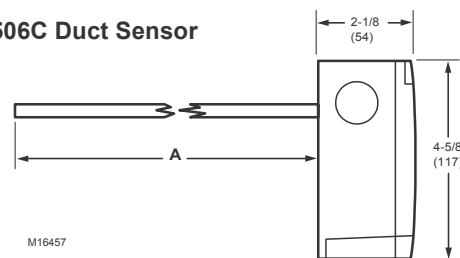


T7506C Duct Averaging Sensor

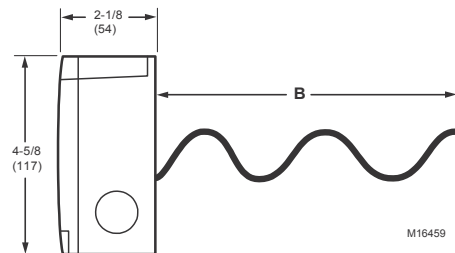

T7506 C

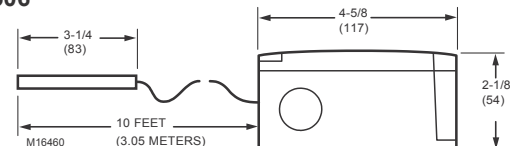

T7506C Immersion Sensor

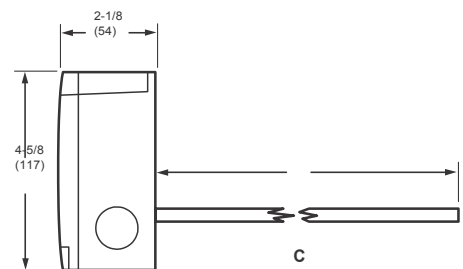

Home and Building Control

Honeywell Inc.
Honeywell Plaza
P.O. Box 524
Minneapolis MN 55408-0524

Home and Building Control

Honeywell Limited-Honeywell Limitée
155 Gordon Baker Road
North York, Ontario
M2H 3N7