

DPTM52-5002

2-WIRE DIFFERENTIAL PRESSURE TRANSMITTERS CURRENT OUTPUT

SPECIFICATION DATA & MOUNTING INSTRUCTIONS



GENERAL

The differential pressure transmitters of the DPTM series are used for measuring differential pressure, positive pressure, and vacuum. The transmitters are suitable for:

- air-conditioning,
- building automation,
- environmental protection,
- valve and flap control,
- filter and blower monitoring,
- fluid and level monitoring, and
- control of air flows.

Models DPTM52-5002

order no.	pressure range		overload capacity	bursting pressure
	1 (pre-set)	2		
DPTM52	-50...0...+50 Pa ¹⁾	n.a.	20 kPa	40 kPa
DPTM112	-100...0...+100 Pa ¹⁾	n.a.	20 kPa	40 kPa
DPTM552	-500...0...+500 Pa ¹⁾	n.a.	20 kPa	40 kPa
DPTM1102	-1 kPa...0...+1 kPa ²⁾	n.a.	40 kPa	70 kPa
DPTM102	0...100 Pa ¹⁾	0...250 Pa	20 kPa	40 kPa
DPTM252	0...250 Pa ¹⁾	0...500 Pa	20 kPa	40 kPa
DPTM502	0...500 Pa ¹⁾	0...1 kPa	20 kPa	40 kPa
DPTM1002	0...1 kPa ²⁾	0...2.5 kPa	40 kPa	70 kPa
DPTM5002	0...5 kPa ³⁾	0...10 kPa	60 kPa	120 kPa

¹⁾ Temperature error at 0...50 °C ≤ ± 5% of FS
²⁾ Temperature error at 0...50 °C ≤ ± 2.5% of FS
³⁾ Temperature error at 0...50 °C ≤ ± 1% of FS

FEATURES

- Monitoring gaseous, non-aggressive media
- Piezo-resistive pressure transducer
- Up to 40 kPa (60 kPa) overload capacity
- Rugged design; protection class IP54
- Easy installation and wiring connection
- Measurement range adjustable by jumper
- Response time adjustable by jumper

NOTE: These sensors are not suitable for use in installations under periodic inspection by the U.S. Food and Drug Administration.

SPECIFICATION

Supply voltage	16...32 Vdc
Output signal	4...20 mA, two-wire
Pressure medium	Air and non-aggressive gases
Working temperature	0...50 °C
Linearity and hysteresis error	± 1.0% of FS
Temperature error	see "Models DPTM52-5002"
Storage temperature	-10...+70 °C
Humidity	0...95% rh, non-condensing
Repetition accuracy	± 0.2% of FS
Response time	1 s (switchable to 100 ms)
Process connection	6 mm hose pipe
Electrical connection	Screw terminal block for wire up to 1.5 mm ²
Housing material	ABS and POM
Cable entry	M20x1.5 (polyamide)
Protection class	IP54 as per EN60529
EMV	EN60770, EN61326
Weight	approx. 130 g

FUNCTION

DPTM52-5002 Two-Wire Differential Pressure Transmitters are equipped with an integrated piezo-resistive pressure transducer. The pressure to be measured is applied to and thus deflects a thin membrane made of mono-silicon. The membrane's semiconductor resistors (arranged to simultaneously compensate for the temperature response) detect this deflection and generate an electrical output signal. The output signal is converted into a 4...20 mA analog signal

which changes (within the specified error limits) in proportion to the applied pressure.

NOTE: The devices are factory pre-set to a response time of 1 second. This can be changed to 100 ms by removing the corresponding jumper (see Fig. 3).

NOTE: The devices are factory pre-set to pressure range 1. This can be changed (except for +/- models) to pressure range 2 by removing the corresponding jumper (see Fig. 3).

ACCESSORIES

DPSK: Included in delivery. Duct Kit, incl. 2 m of silicone hose and two joining pipes

DPSL: Ordered separately. L-shaped mounting brackets with screws.

DIMENSIONS

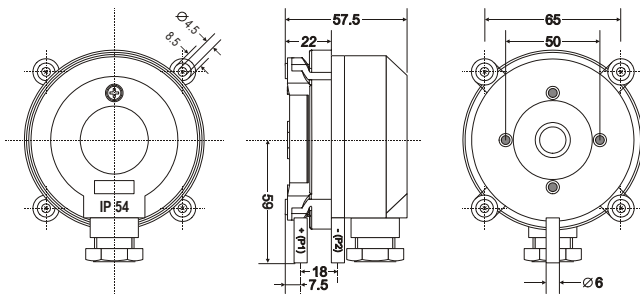


Fig. 1. Dimensions (in mm)

MOUNTING

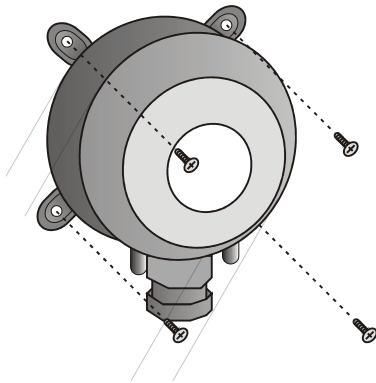


Fig. 2. Mounting

WIRING

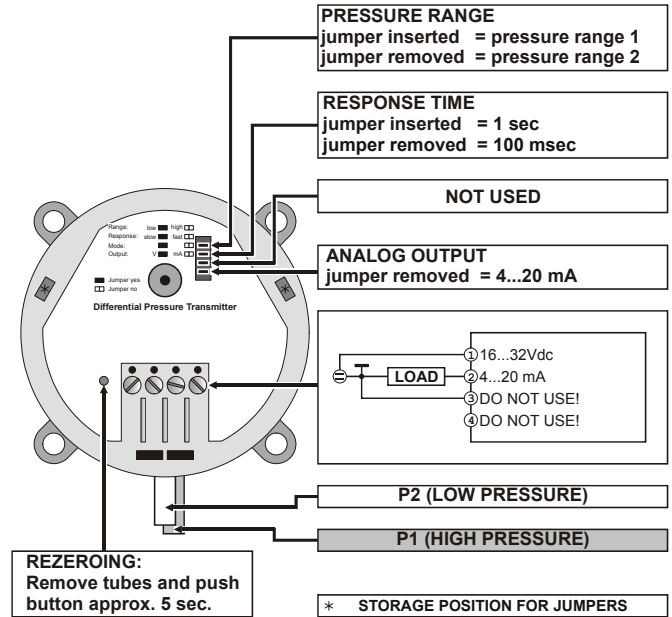


Fig. 3. Wiring details

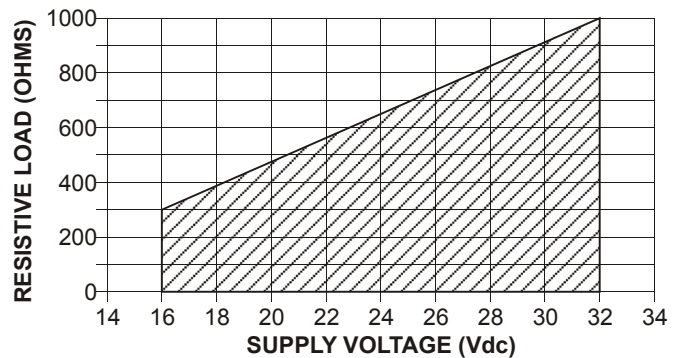


Fig. 4. Permissible load vs. supply voltage

Honeywell

FEMA

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Ecublens, Route du Bois 37, Switzerland by its Authorized Representative:

**Fema Controls
Honeywell GmbH**
P.O. Box 1254
D-71099 Schönaich
phone: (49) 7031-637-02
fax: (49) 7031-637-850
<http://honeywell.de/fema>

Subject to change without notice. Printed in Germany
EN0B-0467GE51 R0607

**DIN EN
ISO 9001**