



## Cable Temperature Sensors

**QAZ21.682/101**  
**QAZ21.685/101**

for use in refrigeration plant

---

**Cable temperature sensor for acquiring the medium temperature in refrigeration plant. Strap-on sensor with 2 cable ties or immersion sensor with a protection pocket.**

### Use

---

For the control or limitation of the medium temperature in refrigeration plant, especially for acquiring the suction gas temperature and for controlling superheat. Suited for use with controllers operating with LG-Ni 1000 sensing elements.

### Ordering and delivery

---

When ordering, please give name and type reference of the sensor, e.g.:

Cable temperature sensor **QAZ21.682/101**

The sensor is supplied complete with 2 cable ties and sleeve coated with thermal conductive wax.

Minimum order quantity: 100 pieces for QAZ21.685/101


### Function

---


The sensor acquires the medium temperature in the solar collector. The resistance value of the sensing element changes as a function of the temperature. It is delivered for further handling by a suitable controller.

**Sensing element**

Characteristic:

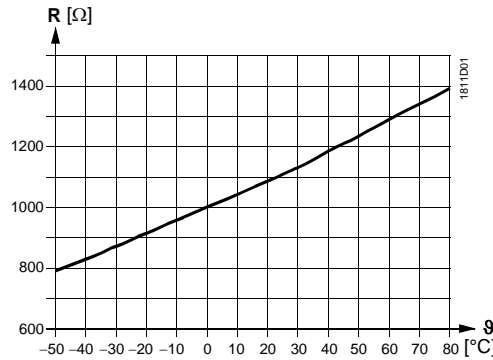

Accuracy:

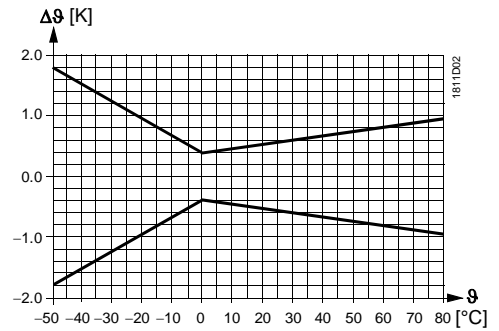

*Legend*

- R Resistance value in Ohm
- $\theta$  Temperature in degrees Celsius
- $\Delta\theta$  Temperature differential in Kelvin

**Mechanical design**

The cable temperature sensor consists of sleeve (6 mm diameter, 50 mm long), sensing element and connecting cable with ferrules.  
 The sensing element is embedded in the sleeve. The sleeve is flat on one side and coated with thermal conductive wax. The sensor is not suited for direct immersion in liquid media (protection pocket mandatory).

**Accessories** (not included with standard delivery)

Name	Type reference
Protection pocket, Ms63, PN10, immersion length 100 mm	<b>ALT-SB100</b> <sup>1)</sup>

1) For other protection pocket accessories, refer to Data Sheet N1194.

**Engineering notes**


The permissible cable lengths are dependent on the type of controller used. For details, refer to the Data Sheet of the relevant controller.

**Mounting notes**

Mounting choices:

On pipes

Place flat section on the pipe and secure with the 2 cable ties supplied with the sensor

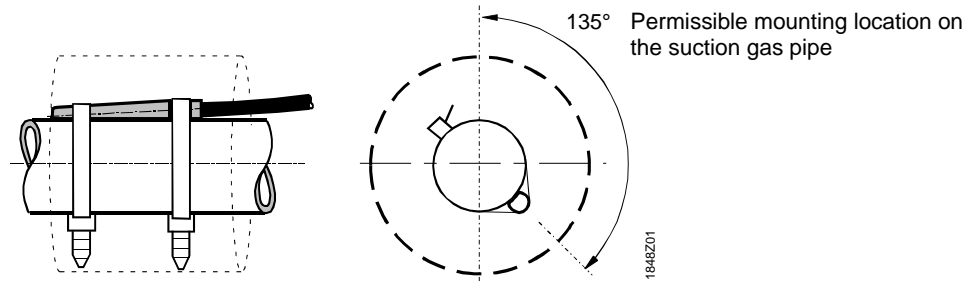

Sensor can be mounted on a piece of pipe with no lagging or underneath the lagging.

Indirect immersion


With the help of a protection pocket. The inside diameter of the pocket should match the diameter of the sensor's sleeve (e.g. 6.1 mm).

The sensor is supplied complete with Mounting Instructions.

## Technical data


Functional data	Sensing range	-50 ... +80 °C
	Sensing element	LG-Ni 1000
	Time constant	
	Sensor when fitted on the pipe	<20 s
	Sensor with protection pocket	<30 s
	Measuring accuracy at 0 °C	±0.4 K (refer to "Function")
	Measurement and output	passive
Connections	Mechanically	cable tie (2x)
	Electrical connections	
	Connecting cable	2-core, interchangeable, with ferrules
	Cable length	approx. 1.5 m
	Perm. cable length	refer to "Engineering notes"
Protective data	Degree of protection	IP 67 to IEC 529
	Safety class	III to EN 60 730
Environmental conditions	Operation to	IEC 721-3-3
	Climatic conditions	class 3K8H
	Temperature	-50...+80 °C
	Humidity	10...100 % r. h.
	Transport to	IEC 721-3-2
	Climatic conditions	class 2K3
	Temperature	-50...+80 °C
	Humidity	<100 % r. h.
Materials	Sensor sleeve	stainless steel V4A (1.4571)
	Connecting cable	silicon
	Packaging (minigrip® bag)	PVC
Weight	Including packaging	0.075 kg

## Internal diagram




## Dimensions

### QAZ21...

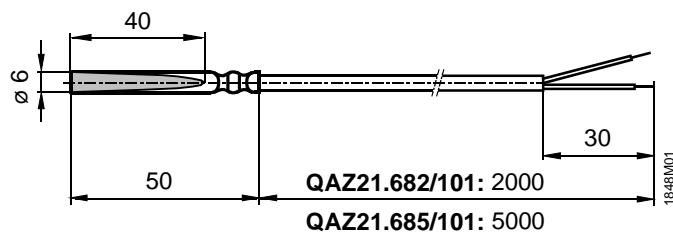

### ALT-SB100

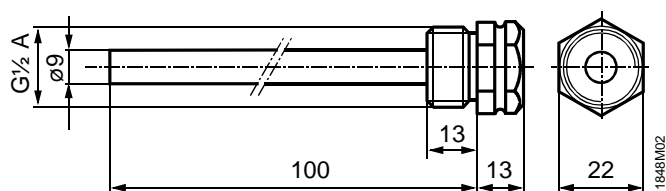

Dimensions in mm

